


RESYTORK COUNTERSUNK SELF TAPPING SCREWS

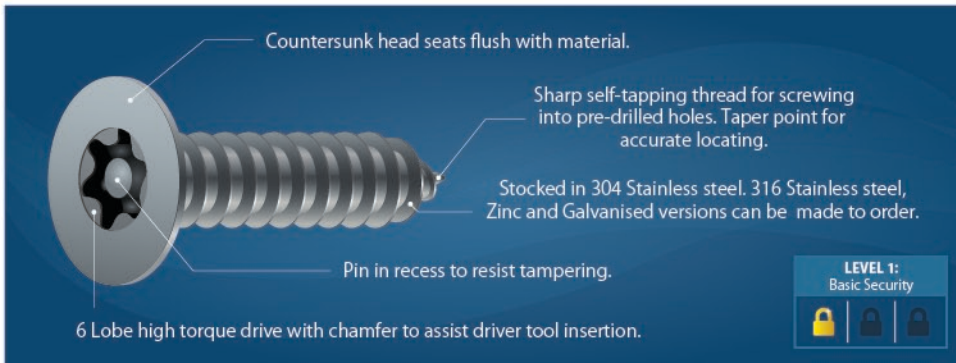

Countersunk head seats flush with material.


Sharp self-tapping thread for screwing into pre-drilled holes. Taper point for accurate locating.

Stocked in 304 Stainless steel. 316 Stainless steel, Zinc and Galvanised versions can be made to order.


Pin in recess to resist tampering.

6 Lobe high torque drive with chamfer to assist driver tool insertion.


LEVEL 1:
Basic Security




Can be installed and removed with the following tools:



Insert Bit



Key Wrench



Screwdriver

See page 134 - For more details on Driver Tools



PART NO.	LENGTH	DRIVE SIZE	HEAD DIA	HEAD HEIGHT	MATERIAL	\$/100
RTCS4D	1/2" (13mm)	T10	4.8mm	1.8mm	304 S/S	\$73.00
RTCS4F	3/4" (19mm)	T10	4.8mm	1.8mm	304 S/S	\$76.00



PART NO.	LENGTH	DRIVE SIZE	HEAD DIA	HEAD HEIGHT	MATERIAL	\$/100
RTCS6C	3/8" (9.5mm)	T15	6.6mm	2.1mm	304 S/S	\$82.20
RTCS6D	1/2" (13mm)	T15	6.6mm	2.1mm	304 S/S	\$83.80
RTCS6E	5/8" (16mm)	T15	6.6mm	2.1mm	304 S/S	\$86.60
RTCS6F	3/4" (19mm)	T15	6.6mm	2.1mm	304 S/S	\$89.90
RTCS6G	1" (25mm)	T15	6.6mm	2.1mm	304 S/S	\$95.80
RTCS6H	1 1/4" (32mm)	T15	6.6mm	2.1mm	305 S/S	\$109.80
RTCS6I	1 1/2" (38mm)	T15	6.6mm	2.1mm	304 S/S	\$125.10
RTCS6J	2" (50mm)	T15	6.6mm	2.1mm	304 S/S	\$162.50
RTCS6K	2 1/2" (63mm)	T15	6.6mm	2.1mm	304 S/S	\$328.00

